




Lte.shop srl
Via Castellini 15, 25030
Erbusco (BS) – ITALY
www.lte-shop.com

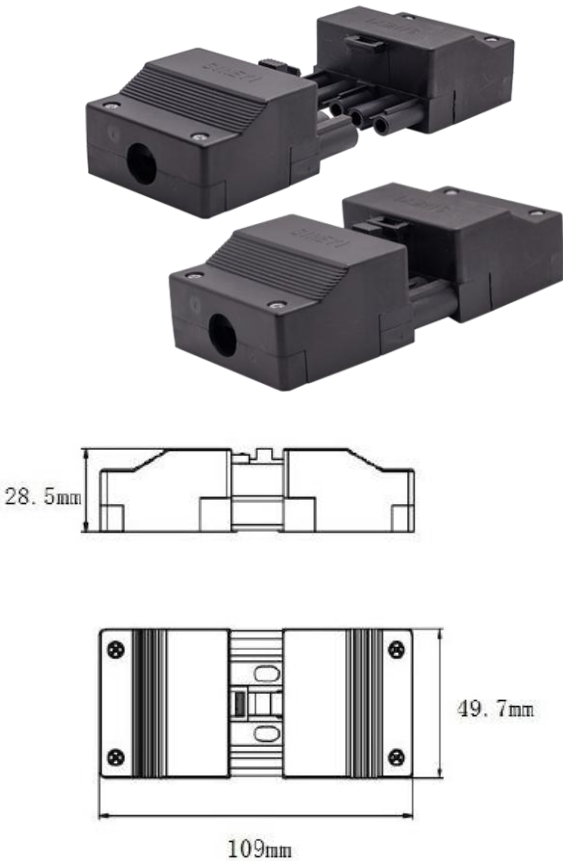

CONNETTORI MASCHIO-FEMMINA 5P CON FISSACAVO

5P MALE-FEMALE CONNECTORS (Pluggable terminal blocks) WITH STRAIN RELIEF

Cod:

- 5P C1002PS-5P

Altre versioni disponibili:
Other versions available:

- 2P C1002PS-2P
- 3P C1002PS-3P

Peso/Weight: gr 74,7

Questi connettori plug and play sono componenti elettrici versatili e di qualità adatta per collegamenti sicuri. Il design compatto e facile da usare lo rende comodo per varie applicazioni, soddisfacendo gli standard e le normative del settore. È adatto per l'automazione industriale, i sistemi di illuminazione e altre applicazioni elettriche.

These plug and play connectors are versatile electrical components of suitable quality for secure connections. The compact and easy-to-use design makes it convenient for various applications, meeting industry standards and regulations. It is suitable for industrial automation, lighting systems, and other electrical applications.

DATI TECNICI:	
Tensione nominale:	450V
Corrente nominale:	16A
Tensione di impulso max:	4kV
Tipo di connessione:	Morsetto e vite
Sezione cavi:	0,5÷4 mmq
Spelatura cavi:	6-8 mm
Tipo di cavi:	Rigidi – semirigidi - flessibili
Temperatura di funzionamento	-40°C to +85°C
Grado di protezione:	IP00

MATERIALI:	
Corpo:	PA66 UL94-V2
Parti metalliche:	Ottone/Rame (viti in acciaio)

MARCHI DI QUALITÀ:	
   	

TECHNICAL DATA:	
Rated voltage:	450V
Rated current:	16A
Max rate impulse voltage:	4kV
Connection type:	Terminal and screw
Cable range:	0,5÷4 mmq
Wire stripping/terminal:	6-8 mm
Cable type:	rigid, semi-rigid, flexible
Operating temperature:	-40°C to +85°C
IP code:	IP00

MATERIALS:	
Housing:	PA66 UL94-V2
Metal part:	Brass/Copper (steel screws)

QUALITY STANDARD:	
   	