



LTE  
shop

Lte.shop srl  
Via Castellini 15, 25030  
Erbusco (BS) – ITALY  
[www.lte-shop.com](http://www.lte-shop.com)



IP68

CONNETTORE/PRESSACAVO IP68 - ATTACCO  
RAPIDO, PER SCATOLE DERIVAZIONE PER  
CAVI MULTIPOLARI ( da esterno ) - **3 POLI**

*IP68 CONNECTOR/CABLE GLAND - QUICK  
CONNECTION, FOR JUNCTION BOXES FOR  
MULTICORE CABLES (for outdoor use) - **3POLES***

Cod:

• 3P      C2002B-3P


Altre versioni disponibili:

Other versions available:

• 2P      C2001B-2P  
• 5P      C2003B-5P

Peso/Weight: gr 20,4

Diam. mm 9  
Per cavi mm 7/9

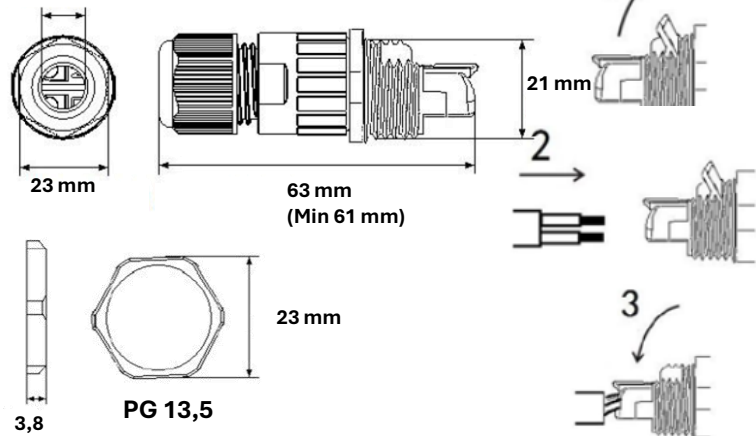

I connettori per cavi multipolari da esterno, particolarmente adatti per impianti di illuminazione, offrono notevoli vantaggi nell'esecuzione di giunzioni in aree particolarmente umide. La classe di protezione IP68 e la connessione dei singoli fili con attacco rapido a levetta garantiscono notevole facilità, sicurezza e velocità nell'esecuzione dei collegamenti.

*Connectors for outdoor multicore cables, particularly suitable for lighting systems, offer considerable advantages in making splices in particularly humid areas. The IP68 protection class and the connection of the individual wires with a quick toggle connection guarantee considerable ease, safety and speed in the execution of connections.*

DATI TECNICI:

|                              |                                  |
|------------------------------|----------------------------------|
| Tensione nominale:           | 250V                             |
| Corrente nominale:           | 16A                              |
| Categoria di sovratensione:  | II                               |
| Tipo di connessione:         | Innesto rapido                   |
| Sezione cavi:                | 0,5÷2,5 mmq                      |
| Ø esterno cavi ammissibile:  | Da mm 7 a mm 9                   |
| Tipo di cavi:                | Rigidi – semirigidi - flessibili |
| Temperatura di funzionamento | -40°C to +85°C                   |
| Grado di protezione:         | IP68                             |

MATERIALI:

|                   |                          |
|-------------------|--------------------------|
| Corpo:            | PA Nylon 66, UL94v2 - PC |
| Parti metalliche: | Ottone                   |

MARCHI DI QUALITA':



TECHNICAL DATA:

|                        |                             |
|------------------------|-----------------------------|
| Rated voltage:         | 250V                        |
| Rated current:         | 16A                         |
| Overvoltage Category:  | II                          |
| Connection type:       | Quick connection            |
| Cable range:           | 0,5÷2,5 mmq                 |
| Admissible external Ø  | From 7 to 9 mm              |
| Cable type:            | rigid, semi-rigid, flexible |
| Operating temperature: | -40°C to +85°C              |
| IP code:               | IP68                        |

MATERIALS:

|             |                          |
|-------------|--------------------------|
| Housing:    | PA Nylon 66, UL94v2 - PC |
| Metal part: | Brass                    |

QUALITY STANDARD:

