




LTE
shop

Lte.shop srl
Via Castellini 15, 25030
Erbusco (BS) – ITALY
www.lte-shop.com



IP68

CONNETTORE/PRESSACAVO IP68 - ATTACCO RAPIDO, PER SCATOLE DERIVAZIONE PER CAVI MULTIPOLARI (da esterno) - 5 POLI

IP68 CONNECTOR/CABLE GLAND - QUICK CONNECTION, FOR JUNCTION BOXES FOR MULTICORE CABLES (for outdoor use) - 5 POLES

Cod:


• 5P — C2003B-5P

Altre versioni disponibili:



Other versions available:

• 2P — C2001B-2P
• 3P — C2002B-3P

Peso/Weight: gr 34,6

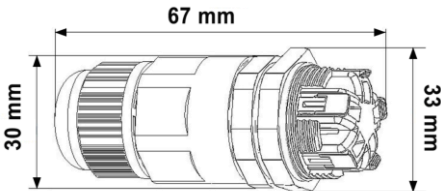

Diam. mm 9
Per cavi mm 7/9

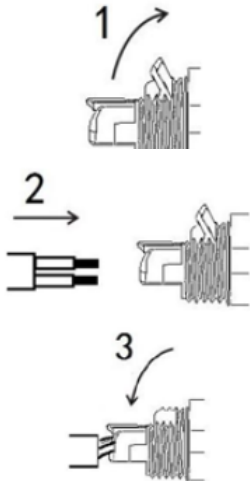

I connettori per cavi multipolari da esterno, particolarmente adatti per impianti di illuminazione, offrono notevoli vantaggi nell'esecuzione di giunzioni in aree particolarmente umide. La classe di protezione IP68 e la connessione dei singoli fili con attacco rapido a levetta garantiscono notevole facilità, sicurezza e velocità nell'esecuzione dei collegamenti.

Connectors for outdoor multicore cables, particularly suitable for lighting systems, offer considerable advantages in making splices in particularly humid areas. The IP68 protection class and the connection of the individual wires with a quick toggle connection guarantee considerable ease, safety and speed in the execution of connections.

DATI TECNICI:

Tensione nominale:	250V
Corrente nominale:	16A
Categoria di sovratensione:	II
Tipo di connessione:	Innesto rapido
Sezione cavi:	0,75÷2,5 mmq
Ø esterno cavi ammissibile:	Da mm 7 a mm 9
Tipo di cavi:	Rigidi – semirigidi - flessibili
Temperatura di funzionamento	-40°C to +85°C
Grado di protezione:	IP68

MATERIALI:

Corpo:	PA Nylon 66, UL94v2 - PC
Parti metalliche:	Ottone

MARCHI DI QUALITA':



TECHNICAL DATA:

Rated voltage:	250V
Rated current:	16A
Overvoltage Category:	II
Connection type:	Quick connection
Cable range:	0,75÷2,5 mmq
Admissible external Ø	From 7 to 9 mm
Cable type:	rigid, semi-rigid, flexible
Operating temperature:	-40°C to +85°C
IP code:	IP68

MATERIALS:

Housing:	PA Nylon 66, UL94v2 - PC
Metal part:	Brass

QUALITY STANDARD:

