



LTE
shop




Lte.shop srl
Via Castellini 15, 25030
Erbusco (BS) – ITALY
www.lte-shop.com

MORSETTO/CONNETTORE ATTACCO RAPIDO
A LEVA - 1-2-3 POLI - moduli componibili

TERMINAL BLOCKS - QUICK LEVER CONNECTION
- 1-2-3 POLES - modular items

Cod:

- 1P CM2001-1P
- 2P CM2001-2P
- 3P CM2001-3P

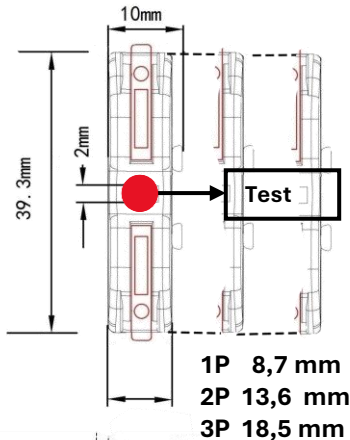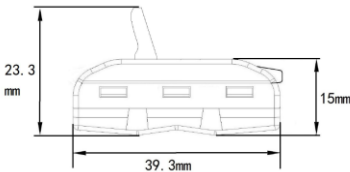

Max ø guaina 4 mm
wire sheath max ø 4 mm

Peso/Weight: gr.....

Peso/Weight: 1P gr 4,9 2P gr 7,6 3P gr 10,4

Con il sistema di collegamento rapido a levetta questi componenti permettono in modo semplice, veloce e sicuro la connessione con fili di diversa sezione e tipologia. E' particolarmente adatto per cablaggi o pre-cablaggi di circuiti interni di apparecchiature elettriche in generale, collegamenti in scatole di derivazione in impianti civili e industriali. I moduli componibili consentono un impiego razionale per le esigenze più diverse.

With the quick lever connection system, these components allow the connection with wires of different sections and types in a simple, fast and safe way. It is particularly suitable for wiring or pre-wiring of internal circuits of electrical equipment in general, connections in junction boxes in civil and industrial systems. The modular modules allow for rational use for a wide variety of requirements.

DATI TECNICI:

Tensione nominale:	250V
Corrente nominale:	32A
Tipo di connessione:	Attacco rapido "a leva"
Sezione cavi:	0,5÷2,5 mmq(f), 0,5÷4 mmq(r)
Tipo di cavi:	Rigidi – semirigidi - flessibili
Temperatura di funzionamento	-40°C to +85°C

MATERIALI:

Corpo:	PA66, UL94v2
Parti metalliche:	Ottone/Acciaio

MARCHI DI QUALITA':



TECHNICAL DATA:

Rated voltage:	250V
Rated current:	32A
Connection type:	Quick Lever connection
Cable range:	0,5÷2,5 mmq(f), 0,5÷4 mmq(r)
Cable type:	rigid, semi-rigid, flexible
Operating temperature:	-40°C to +85°C

MATERIALS:

Housing:	PA66, UL94v2
Metal part:	Brass/Steel

QUALITY STANDARD:

