




LTE
shop

Lte.shop srl
Via Castellini 15, 25030
Erbusco (BS) – ITALY
www.lte-shop.com

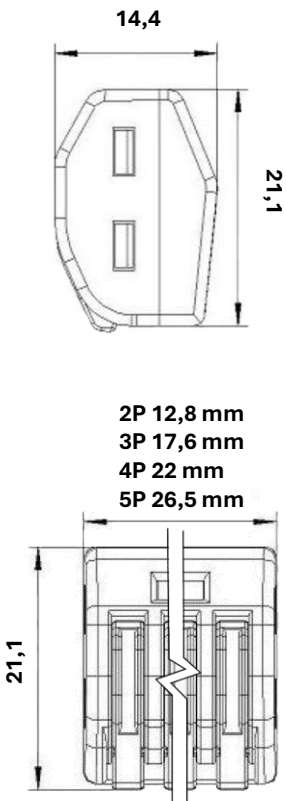

MORSETTO ATTACCO RAPIDO A LEVA
- 2÷5 POLI

TERMINAL BLOCKS - QUICK LEVER CONNECTION
- 2÷5 POLES

Cod:

- 2P M1001-2P
- 3P M1001-3P
- 4P M1001-4P
- 5P M1001-5P

Peso/Weight: 2P gr 3,4 4P gr 5,9
 3P gr 4,7 5P gr 7,1

Con il sistema di collegamento rapido a levetta questi componenti permettono in modo semplice, veloce e sicuro la connessione con fili di diversa sezione e tipologia. E' particolarmente adatto per cablaggi o pre-cablaggi di circuiti interni di apparecchiature elettriche in generale, collegamenti in scatole di derivazione in impianti civili e industriali.

With the quick lever connection system, these components allow the connection with wires of different sections and types in a simple, fast and safe way. It is particularly suitable for wiring or pre-wiring of internal circuits of electrical equipment in general, connections in junction boxes in civil and industrial systems.

DATI TECNICI:	
Tensione nominale:	250V
Corrente nominale:	32A
Tipo di connessione:	Attacco rapido "a leva"
Sezione cavi:	0,5÷2,5 mmq(f),0,5÷4 mmq(r)
Tipo di cavi:	Rigidi – semirigidi - flessibili
Temperatura di funzionamento	-40°C to +85°C
MATERIALI:	
Corpo:	PA66,UL94v2
Parti metalliche:	Ottone/Acciaio
MARCHI DI QUALITA':	
  	

TECHNICAL DATA:	
Rated voltage:	250V
Rated current:	32A
Connection type:	Quick Lever connection
Cable range:	0,5÷2,5 mmq(f),0,5÷4 mmq(r)
Cable type:	rigid, semi-rigid, flexible
Operating temperature:	-40°C to +85°C
MATERIALS:	
Housing:	PA66, UL94v2
Metal part:	Brass/Steel
QUALITY STANDARD:	
  	