



Lte.shop srl
Via Castellini 15, 25030
Erbusco (BS) – ITALY
www.lte-shop.com

GZ10


Cod:
PTL052

Portalampada per lampade ad alogeni
a tensione di rete con riflettore in
vetro dicroico (attacco GZ10).

*Lamp holder for mains voltage halogen lamps with
dichroic glass reflector (GZ10 socket).*



Senza cavi/without cables

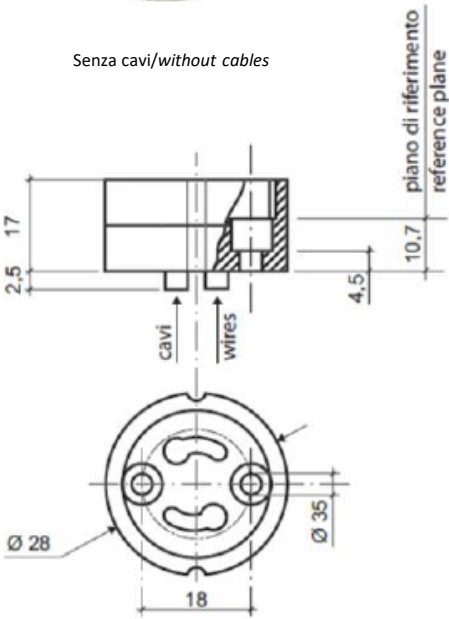

Nota/Notes

Il portalampada è idoneo per l'impiego in apparecchi di classe II se equipaggiato con cavi in doppio isolamento.

If equipped with double insulation cables this lamp-holder is suitable for Class II devices.

Peso/Weight: gr 12,5

DATI TECNICI:	
Tensione nominale:	250V
Corrente nominale:	2A
Temperatura di funzionamento:	T250°C
Tipo di connessione:	Morsetto ad innesto rapido per fili rigidi o flessibili . Se flessibili con puntalinoterminal di Ø 2mm max
Categoria di tenuta all'impulso:	II
Capacità di connessione morsetti:	0,5÷0,75 mmq – Ext max ø 2,8 mm
Fissaggio corpo:	Con viti M3
Materiale corpo:	Steatite
Materiale contatti:	acciaio inox
Conforme alla direttiva:	2006/95/CE 

TECHNICAL DATA:	
Rated Voltage:	250V
Rated Current:	2A
Operating Temperature:	T250°C
Connection Type:	Quick coupling clamp for solid or flexible wires. If flexible with Ø 2mm max end ferrule
Impulse Tightness Category:	II
Terminal Connection Capacity:	0,5÷0,75 mmq – Ext max ø 2,8 mm
Body fixing:	With M3 screws
Body Material:	Steatite
Contact material:	stainless steel
Complies with the Directive:	2006/95/CE 