



LTE
shop

Lte.shop srl
Via Castellini 15, 25030 Erbusco
(BS) – ITALY
www.lte-shop.com

GU10




Cod:
PTL057-15

Portalampada per lampade ad alogeni a tensione di rete con riflettore in alluminio (attacco GU10).



Lamp holder for mains voltage halogen lamps with aluminium reflector (GU10 socket).

Accessori/fixings:

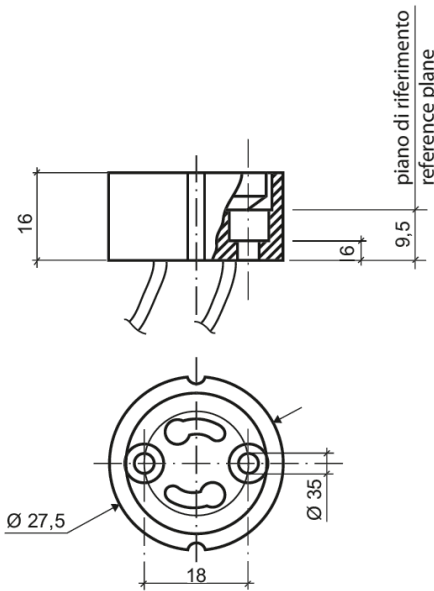

Peso/Weight: gr 18

Cod:
057-08

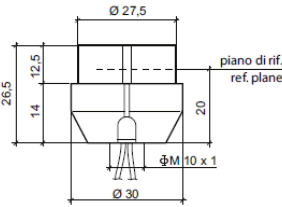



Cappuccio in PPS con filetto femmina da 10x1.

PPS cap with 10x1 female thread.

Peso/Weight: gr. 4

Cod:
057-07

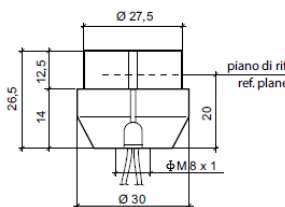



Cappuccio in PPS con filetto femmina da 8x1.

PPS cap with 8x1 female thread.

Peso/Weight: gr. 4

Cod:
057-09

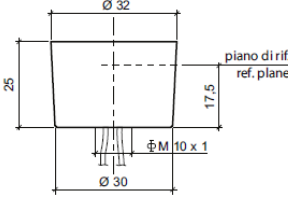

Cappuccio in PPS con filetto femmina da 10x1.

PPS cap with 10x1 female thread.

Peso/Weight: gr. 6

DATI TECNICI:	
Tensione nominale:	250V
Corrente nominale:	2A
Temperatura di funzionamento:	T300°C
Categoria di tenuta all'impulso:	II
Cavo di collegamento standard:	Isolamento in gomma siliconica (T.max 180°C) lunghezza 15 cm, sez. 0,75 mmq, spelatura 6 mm.
Materiale corpo:	Steatite
Coperchio:	MICA
Materiale contatti:	acciaio inox
Fissaggio corpo:	Viti M3
Conforme alla direttiva:	2006/95/CE 

TECHNICAL DATA:	
Rated Voltage:	250V
Rated Current:	2A
Operating Temperature:	T300°C
Impulse Tightness Category:	II
Standard connection cable:	Silicone rubber insulation (T.max 180°C) length 15 cm, section 0.75 sq mm, stripping 6 mm.
Body Material:	Steatite
Cover:	MICA
Contact material:	stainless steel
Body fixing:	M3 year
Complies with the Directive:	2006/95/CE 