



LTE
shop

Lte.shop srl
Via Castellini 15, 25030
Erbusco (BS) – ITALY
www.lte-shop.com


R7s

Con flangia di fissaggio anteriore
With front clamping flange

Per lampade ad
incandescenza ad alogeni
a tensione di rete

For main voltage halogen
incandescent lamps

Cod:
PTL0104-35

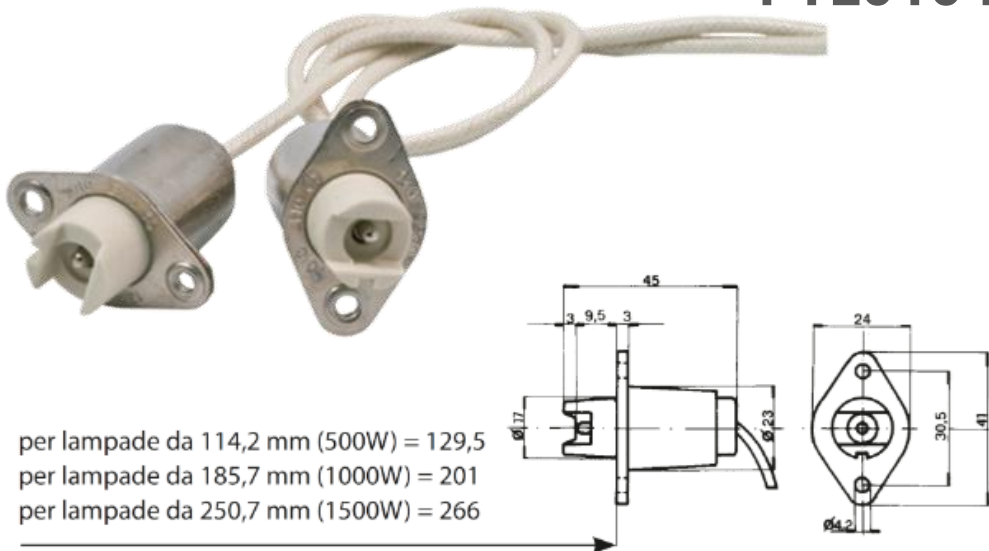

Peso/Weight: gr 93/coppia

DATI TECNICI:	
Tensione nominale:	250 V
Corrente nominale:	12 A
Temperatura di funzionamento:	T250°C
Categoria di tenuta all'impulso:	III
Cavo di collegamento standard: Isolamento in gomma siliconica/fibra vetro (T max.180°C) lunghezza 35cm, sez.1,5 mm² Altri tipi di cavo su richiesta	
Corpo in ottone pressofuso nichelato	
Boccola porta contatto in ceramica	
Conforme direttiva:	2006/95/CE 
DISTANZA DI MONTAGGIO Deve essere rispettata scrupolosamente la distanza indicata. I singoli portalamпада devono essere supportati rigidamente per non compromettere la spinta esercitata dalle molle sui contatti.	

TECHNICAL DATA:	
Rated voltage:	250V
Rated current:	12 A
Nominal highest working temp.	T250°C
Impulse withstand category	III
Standard connection leads silicone rubber /fiberglass insulation (max T 180°C) lenght 35cm, section 1,5mm² Other types of leads available on demand	
Die-cast nickel-plated brass body	
Contact holder bushing in ceramic	
In conformity with directive	2006/95/CE 
ASSEMBLING DISTANCE The distance indicated must be strictly observed. Each individual lampholder must be firmly supported in order to guarantee that the springs exert the required pressure on contacts.	